



Discover The Cutting Edge

Manufactured & Assembled in the USA

Great for clearing under brush & saplings, mowing around trees & under fences and clearing paths & trails

pictured: Model 1305



Model 1305 Multi-Use Tractor For Use With Quick Change Attachments

NEW



TUR 1305PL Plow

The 46 inch wide plow is ideal for snow removal and grading/leveling soil and gravel. The Plow angle (left/right) can be easily adjusted from the operator position and its unique design has the capability to allow the blade to oscillate or to be locked into position. The Model 1305PL utilizes

an innovative compression spring trip release. Additional features include a replaceable cutting edge, a fully hydrostatic transmission with forward /reverse and a 13 HP Honda engine. The Plow can also be easily converted into a Power Edger, Power Broom, Power Rake or Brush Cutter for all season use. Plow also sold separately.

The Grillo Climber Mower 9.21



The Climber will go where no other ride-on mower will.

A 36" rear discharge tuff cut mower with 21 HP Vanguard air cooled engine, front brakes, differential lock, roll bar, hydrostatic transmission, and swaking blades. Extend your mowing into sloping terrain, rough ground and tall grass.



Design

The Climber's unique design, with its low center of gravity, central weight distribution, and differential locking capability will help you mow places you can't even take a tractor. Go places you have never gone before and extend your mowing where previously impossible. The Climber is designed to mow safely up and down slopes up to 33° and up to 17° across slopes, even on difficult and slippery terrain.



Reliability

The difference with Grillo is that as a family owned business, established on quality, keeping this value in their products is very important. Grillo is Italian and built to last. Their high quality components, top class manufacturing and highly innovative design makes their mower stand out above the rest. Professional equipment that provides great performance.



Performance

The Climber is designed for the rough stuff. It will take care of 3' tall grass, weeds and brush. It's capable of flattening an overgrown section, or those properties you can't mow every week, making it a perfect choice for the Christmas tree grower. Non-mulching rear discharge is the secret to this aggressive and effective cutting system. The Climber loses no power as it charges through grass, leaving an even spread of cut grass in its wake.



The Ultimate Tree Mower

A unique mower designed to maintain grass and small brush growth on tree farms, nurseries and blueberry farms



VENTRAC 3100/3200 with Tree Mower - LQ450

- All Wheel Drive
- Tree Deck 45"
- Hydro Lift
- 3 Cutting Heights - 2 1/4", 3 1/2", 4 3/4"
- Branch Lifters & Tire Covers - Standard
- Rear Engine Design, Less Heat/Noise/Exhaust
- Counter Rotating Blade, Rear Discharge - Leaves Clippings in Middle
- 26" Turning Radius
- Suspended front chains, cuts tall grass more effectively, reduces potential of front discharge
- Single swivel front tire
- Optional weed sprayer listed below



GAS OR DIESEL ENGINE OPTIONS



VENTRAC - COMPACT TRACTORS

VENTRAC 3100/3200 Spraying Unit SPRAY ATTACHMENT SPECIFICATIONS

Tank: 15 gallon polyethylene
Pump: 1.4 GPM, 12 volt diaphragm pump
Pressure: Manual adjustable bypass
Spray Nozzles: Single swivel nozzle bodies mounted one each side of tractor. Adjustable in width and height
Controls: Independent nozzle controls right or left
Valves: Manual valves
Steel Framework: Easily attaches to tractor hitch
Tips: Standard, off-center flat fan, other tips available as options.
Hand wand with 6' hose included for spot spray treatment.

SET Ventrac-12V

All components available separately



Sprayer nozzles are adjustable in width and height



Single swivel adjustable nozzle body with OC tips

VENTRAC with LC150 Stump Grinder

The LC150 stump grinder features 12 replaceable carbide cutting teeth. Adjustable blade hydraulically lowers to double as a jack stand and depth gauge.
AVAILABLE FOR MODELS 3000, 3100 AND 3200

LC150 STUMP GRINDER SPECIFICATIONS

Rotor tip speed: 2,475 ft./min*
Rotor RPM: 620 RPM*
Cutting depth below ground level: 6"

* Engine speed of 3200 RPM



Ideal for grinding stumps in the tight quarters of a choose and cut operation





4200VXD ...PROFESSIONAL GRADE

The 4200VXD Compact Articulating Tractor is professional grade, giving you the ultimate in power, performance and productivity all in one machine. Others can only dream about Ventrac's innovative design of an articulating, oscillating frame, combined with All-Wheel-Drive allowing you to maneuver around obstacles and traverse a variety of terrain.

	4200VXD
Engines	Kawasaki 27 hp Gas 2-cyl 745cc Vanguard 26.5 hp Dsl 3-cyl 952cc Vanguard 31 hp Gas 3-cyl 952cc Vanguard 31 hp Turbo Dsl 3-cyl 952cc (All 4200VXD engines are Liquid-cooled)
Drive	All wheel drive (AWD)
Dimensions	Wheelbase: 43 in. Length: 77 in. Overall Height: 67 in. (to top of rollbar) Width: 49 in. (w/single turf tires) 70 in. (w/dual turf tires)
Turning Radius	43 inches

**RENTAL
AVAILABLE**

**A Full Complement Of Attachments Are Available
OVER 40 TO CHOOSE FROM!**

CALL FOR DETAILS & DEMONSTRATION

Get attached - Get it done!

VENTRAC MOUNT SYSTEM

This easy-to-use connection gives the operator the advantage of connecting and disconnecting to a variety of Ventrac designed attachments with ease and speed.

- Single lever quick release
- Slide on attachment rails
- Quick and easy PTO connection
- "Quick Couplers" for hydraulic hoses
- Optional dual wheels for 30° continuous side hill operation

TACKLE THE IMPOSSIBLE!

Get maximum angle of operation with the Ventrac 4200VXD, approved for 30° continuous operation, when equipped with dual wheels.



HEAVY METAL (HM) SERIES





STANDARD FEATURES:

- All wheel drive
- Hydrostatic drive
- Articulating/oscillating frame
- S.D.L.A. controls
- Foot pedal

OPTIONAL FEATURES:

- Knobby tires
- Weight transfer (standard on 3200)
- Tilt steering (standard on 3200)
- 12 volt power supply/switch control
- Suspension seat
- Roll bar
- Tractor cab

LE 3100/3200 ...

Good things come in small packages

These power-packed units feature all-wheel-drive, power steering, hydrostatic drive, and more. The Ventrac Mount System allows you to change attachments quickly and efficiently, moving from job to job with minimal effort.

Equipped with a patented Tandem Drive train, the 3100 & 3200 efficiently transfers power to where it's needed for unparalleled performance and power.

Also standard on the 3100 & 3200 is Ventrac's patented S.D.L.A. control, which allows for easy command of speed, direction, lift and auxiliary function all with one hand.

Combine these features with a tight 28" turning radius and you will find the 3100 & 3200 can tackle jobs reserved for much larger, less maneuverable machines.



Shown with optional cab

3100: 21HP V-twin air cooled engine, gas **OR 3200:** 23.6HP Liquid cooled engine,



Over 20 attachments available

4100 ... As Individual As You Are



The Ventrac 4100 is designed and built with the same inherent quality, versatility, safety and control as the 4200VXD. Equipped with a powerful V-Twin 31 HP Air-Cooled engine and driven by Ventrac's high efficiency hydraulic drive system.



	4131
Engine	31 HP Kawasaki Gas (Air-cooled)
Drive	All wheel drive (AWD)
Dimensions	Wheelbase: 43 in. Length: 77 in. Overall Height: 67 in. (to top of rollbar) Width: 48 in. (w/single turf tires) 70 in. (w/dual turf tires)
Turning Radius	43 inches



FERRI ZMT



Offset in-line slope mowers For Agriculture and Roadside Tractors from 50 - 80 HP

ZMT160 — 50-60HP, 5'3" cut width
ZMT180 — 60-70HP, 5'11" cut width
ZMT200 — 70-80HP, 6'7" cut width



FERRI MT

Mowers For mowing grass and twigs

MT140 — 30-45HP, 4'7" cut width
MT160 — 35-50HP, 5'3" cut width
MT180 — 45-60HP, 5'11" cut width
MT200 — 50-70HP, 6'7" cut width



FERRI ME

Mowers For mowing grass

ME125 — 20-25HP, 4'1" cut width
ME155 — 25-30HP, 5'1" cut width

Ferri offset flails work well for long reach or ditch bank mowing. Flails lift to 90° vertical or down to -50°. Safe and perfectly balanced, these machines allow for careful working even in difficult situations. ME and MT mowers for grass and light brush include adjustable rear roller, internal sealed rotor bearings, double skin and cast iron gear box.

FERRI ZME

Offset in-line slope mowers Specifically designed for compact tractors

ZME125 — 18-30HP, 4'1" cut width
ZME155 — 25-40HP, 5'1" cut width



Flail Choppers

3 pt. hitch PTO chopper is very heavily constructed complete with: rear roller, belt drive through H.D. gearbox, H.D. 5 lb. flails, adjustable cut height 3/4" - 4 3/4", parallelogram hitch. Brush rake and swinging rotary mower arm optional.

Model	BG-180	KG-220
Cut Width	5'11"	7'3"
Offset from Center	4'10"	6'2"
Min. HP-Grass/Brush	35/45	40/60
Weight-Lbs.	1280	1480


Other widths available. Call for more information.

Parts and service for all Perfect mowers and shredders.
Call or write for specific information on Perfect equipment.

OMF-750 SERIES

- Super-duty low profile Flail Chopper
- 2 3/4 lb. hard faced hammers mounted on 3/4" Grade 9 bolts with 1 1/2" mount pads
- 2.4375" spherical roller main bearings
- Double wall housing 3/8 liner under 3/16 skin
- 24" hydraulic offset standard
- Floating top link pad
- Cutting width from 4'-9'
- Heavy duty - 6'-2,154 lbs., 7'-2,350 lbs., 8'-2,550 lbs.
- Options: Push/pull mount

REARS



OMF Flail Hanger



SPF FLAIL MOWER



- For the lowest horsepower available in tractor restrictive plantings. Ideal for cane, berries, Christmas trees, ski resorts, parks, golf courses, nurseries.
- 3-point mount, centered or offset. 24 to 100 inch cutting widths.
- Options: Low-profile unit. Hydraulic offset. Front mount unit. Push/pull mount. Right hand drive. Narrow vineyard profile
- 0 to 6 inch cutting height.



- A** - left hand drive, fixed right offset
B - left hand drive, fixed center mount
C - left hand drive, hydraulic pantograph




The Series 750 OMF flail uses a double row spherical roller bearing with oversize rollers and an eccentric locking collar. This rotor bearing is nested in a labyrinth grease seal.

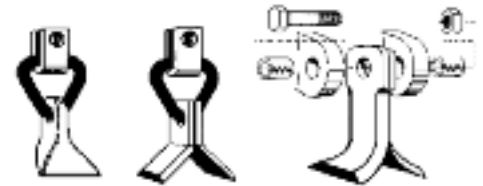

- A** - FL920 Super-TUF hardened grass blade assembly for a finish cut
B - FL960 shredding knife assembly for a coarse cut in grass and for shredding light brush

The FL920 and FL960 blade assemblies are easily replaceable without a wrench or socket. Simply turn the D-ring hanger and slip off the blade.



- C** - FL940 crop chop knife for heavy mowing and brush shredding



Call, email or write for specific information on any flail mower.



REARS FRONT MOUNT

Run the slopes with Rear's Front Mounted Pak-Flail. Pak-Flail mows grass, eats brush and small trees. Leaves a covering of mulch, an ideal light bedding easily covered by the first snow.

Call about the availability of rebuilt equipment as an economical option to new!



Model	Main Deck Spindles	Min. Tractor HP	Min. Width	Max. Width	Weight (lbs.)
SL2-160-210	2	30	64"	84"	770
SL3-180-230	3	30	72"	92"	814
SL3-200-250	3	40	80"	100"	858
SL3-230-280	3	40	91"	110"	924
SL4-270-320	4	80	108"	128"	1100
SL4-310-380	4	60	122"	142"	1188

Fischer's SL Series orchard mowers are rugged, compact and low profile. They are ideal for low-hanging fruit. The swing arm is available in either mechanical or hydraulic sensing retract. The hydraulic sensing style uses the tractor hydraulics to set the width, then the self contained sensing system moves the arm around even the smallest trees with no damage. All SL models include 30" hydraulic linear side shift.

SERIES RF ROTARY MOWERS

3 pt hitch with swing arm. Low construction to clear fruit branches, parallelogram for offset adjustment, front swivel wheels to adjust to terrain, large rear roller, swing arm to cut around tree trunks. Hydraulic offset, swing blades, feeler bar, all optional.

Specifications: Right offset only

Model	RF-220	RF-300
Cut Width	7'3"	9'10"
Offset from Ctr.	7'1"	8'4"
Min. HP	22	30
Weight-Lbs.	905	1135



RF-220 3pt w/ Cutting Width 7'3"



SERIES ZA ROTARY MOWERS

Trailed rotary mower with swing arm. Trailed from the drawbar on the tractor, these machines are capable of large offset. Two large tires and one swivel support mower to give high quality cutting. Swing arm cuts easily around fruit tree trunks. Lengthways transport featured for large machines.

Specifications: Left offset only

Model	ZA-300	ZA-340	ZA-380
Cut Width	9'10"	11'2"	12'6"
Offset from Ctr.	9'1"	10'10"	11'10"
Min. HP	30	35	40
Weight-Lbs.	1115	1230	1345



ZA 300 Rotary w/ Cutting Width 9'10"

SITREX Finish Mowers



L Series - Side discharge

Sitrex three spindle finish mowers.

- Two versions: rear discharge and side discharge, suitable for parks, golf courses, athletic fields, highway maintenance & farming.
- 12-40HP
- Fully floating 3pt. hitch to obtain best cutting finish, even on undulating ground
- All rear discharge models are fitted with safety chains



P Series - Rear discharge

Model	SM 120 L/P	SM 150 L/P	SM 180 L/P
Cut Width	48"	60"	72"
Cut Height	1"-4"	1"-4"	1"-4"
HP Required	12-20	15-30	20-40



GL



Model	Spindles	Min. Tractor HP	Min. Width	Max. Width	Weight (lbs.)
GL4/50-130-215	4	30	51"	85"	660
GL4/60-140-245	4	30	55"	96"	704
GL4/60-180-280	4	40	71"	110"	858
GL4/70-180-300	4	40	71"	118"	891
GL4/80-200-340	4	50	79"	134"	1056
GL4/90-220-380	4	60	87"	150"	1177


The Fischer GL4 features two precision-sensing hydraulically-controlled swing arms, a self-contained hydraulic system and height adjustable rollers, making it an ideal mower for vineyards, tree plantations, nurseries and high-density orchard plantings. The GL4's ability to mow carefully within the row is particularly helpful to growers whose management program does not include the use of herbicide strips. Available in a wide range of sizes.

Pictured with optional Herbicide Kit.

ORCHARD/VINEYARD MOWERS



BV

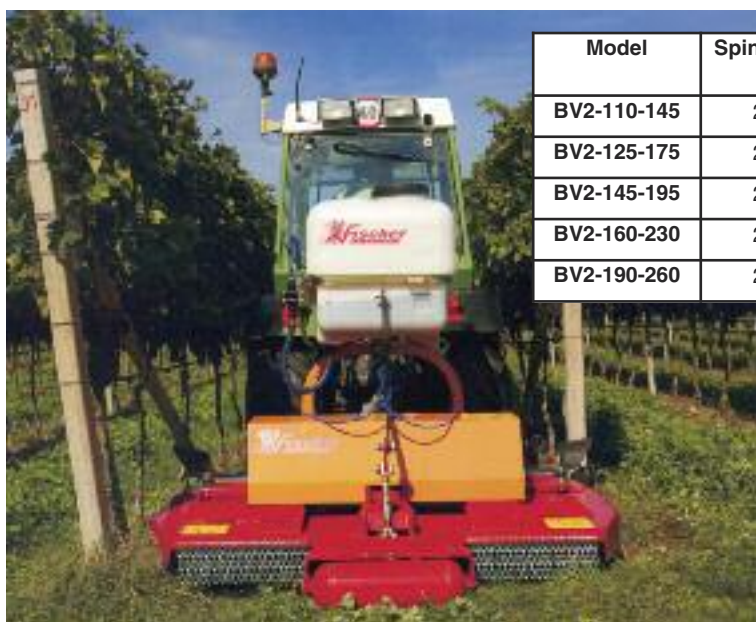

The BV2 is a versatile mower for fruit plantings of all types — tree fruit, grapes or berries. The BV2 features a continuously variable hydraulic width adjustment as well as hydraulic side-shift. It is an ideal machine for variable width plantings where the management plan incorporates herbicide strips.

Model	Spindles	Min. Tractor HP	Min. Width	Max. Width	Weight (lbs.)
BV2-110-145	2	30	43"	43"	660
BV2-125-175	2	30	49"	69"	748
BV2-145-195	2	40	57"	77"	863
BV2-160-230	2	40	63"	91"	1078
BV2-190-260	2	50	75"	102"	1232

Fischer BV2 Features:

- 3 pt hitch mount
- Hydraulic width adjustment
- Hydraulic side shift
- Three over-sized cast gearboxes
- Heavy duty steel plate deck
- Two counter-rotating blade rotors with four swing-mounted mower blades
- Chain guards, front and rear



Pictured with optional Herbicide Kit.





BUSH HOG®

"THE ORIGINAL" SQUEALER ROTARY CUTTERS
Our BEST Selling Rotary Mower!
For light mowing on small or large areas
All made in the USA!



SQUEALER

ALL PARTS AVAILABLE!!



SQ160

- 5 Year Gearbox Limited Warranty
- Pan Type Blade Carrier
- EZ Clean Deck
- Quick Hitch Compatible
- Sidebands With Welded Skids
- EZ Lube Drivelines
- Quick Detach Gearbox Shields
- Bush Hog® Gearboxes

- Powder Coat Paint
- Below Deck Structure
- Rear Band
- Original Bush Hog Design
- Genuine Bush Hog Blades
- Laminated Tail Wheel
- 1" cutting capacity

Single Spindle Models	Squealer 142	Squealer 148	Squealer 160	Squealer 172	Squealer 184
Cut Width	42"	48"	60"	72"	84"
PTO HP required	10-25	15-20	25-40	35-45	Min. 50



SQ84T

SQ84T SQUEALER

with Twin Gearboxes and 9-inch offset

The SQ84T comes in a 7-foot cutting width for tractors from 35 to 50 PTO horsepower. Reliable and durable, this model has everything that made Bush Hog famous.



296

290 SERIES Your BEST choice for medium duty cutting

- Cuts materials to 2"
- Extra deep 1/4" side bands
- Full length strongback
- EZ clean sloped 10 ga. decks
- 130 HP Bush Hog® gearbox
- Replaceable full length skids
- Slip clutch standard

	295	296	297
Cut Width	5'	6'	7'
Min. HP required	35 HP	45 HP	55 HP



326

320 SERIES Your BEST choice for heavy duty cutting

- Cuts materials to 3 1/2"
- Deep sidebands handle heavy volume
- Extra heavy duty hitch & tailwheel assembly and wheel bracket
- Fabricated 7 ga. decks
- 1/4" Sidebands
- Deck reinforcements
- Blade pans
- Cat. 5 driveline

	325	326	327
Cut Width	5'	6'	7'
Min. HP required	40 HP	50 HP	60 HP (lift) 40 HP (pull)



406

406 SERIES One of the toughest cutters on the market!

The 406 is a heavy-duty mower for brush cutting, land clearing, rights-of-way and highway maintenance. Minimum tractor HP - 60 PTO

- Cuts Material Up To 4 Inches
- Heavy Reinforced Deck
- Made For Heavy Brush Clearing
- Extra Heavy Blades
- Front Safety Chains Standard
- Fabricated 1/4 Inch Thick Deck
- 1/4 Inch Sidebands
- 3 Inch x 1 1/2 Inch x 1/4 Inch Channel Strongbacks
- Heavy Duty A Frame And Tail Wheel Bracket
- Extra Heavy Duty Blade Pan
- Extra Heavy Duty Bush Hog Blades
- Powder Coat Paint
- 6' Cut Width

pillon

OESCO now offers the Pillon line of fruit harvesting platforms. These platforms are self propelled, diesel powered with hydraulic movements for the elevation, width and leveling of the platform. They are year round, multiple use machines, equipped with air compressors for pruning. Other uses include: thinning, trellis work and net installation.

Designed for efficiency, they pick up empty bins with the front lift and gently lower the full bins with the rear lift.

Information needed to place an order: row spacing, type of planting (semi-dwarf, dwarf on trellis, tall spindles on trellis), bin sizes, and number of pickers normally used.

We are very enthusiastic about this Italian picking platform!

NEW

Options:

Free wheel device for towing

Remote control



These machines are built to order, offering you the opportunity to customize the unit exactly as you want it. Call to discuss your needs and receive a quote.

PLATFORMS/TRANSPORTERS/DUMPERS



Transporters and Dumpers

Dump box with 3 expandable side boards for large loading platform with hydraulic lift.



BRT BTR-500-HY

Hydraulic dump body with 50 gallon, 1100# capacity.

BRT BTR-500D



SPECIFICATIONS

Engine	Honda GX160, 5.5 hp recoil start gasoline engine
Clutch	Belt driven with automatic disengagement when control lever is released
Transmission	3 forward gears and 1 reverse Mechanical – gears in oil
Speed	Speed forward 1st, .9mph; 2nd, 2mph; 3rd, 3.3mph; Reverse, .9mph
Steering	Independently controlled 28" radius minimum
Brakes	Expansion type, with automatic engagement at clutch disengagement
Ground Clearance	2.8" minimum at gearbox
Crawler Track Contact with Ground	24" long x 7" wide, 25" track width
Platform Body	Adjustable side boards 40" – 48" long
BRT-500-HY	Adjustable side boards 26" – 44" wide
	Capacity 1100 lbs., 50 degree tilt average hydraulic dump
Gravel Body	24" wide capacity 50 gallons
BRT-500-D	1100 lbs. hydraulic dump, 60 degree tilt average
Weight of Machine	450 lbs.
Operation	20 degree slope with load, 40 degrees without load
PTO/Hydraulic	2100 rpm / .6 gpm hydraulic flow



Technology as a passion.

Powerful Articulated Tractor Series for the most demanding farmers and woodlot owners

Tight turning & maneuverability between rows or in woodlots

CLUSTER 70 SN

NEW

The Cluster 70 SN is the powerhouse of the Goldoni Articulated Tractor Series. With a 66 HP water cooled VM diesel engine, and a 3500 lb. 3 pt. hitch lift capacity, the Cluster will out perform other tractors of the same size. The 47" minimum width lets you go where no other tractor of this horsepower will.



EURO 45 SN

NEW

The mid-sized Euro W45SN is a powerful, compact, yet stable tractor capable of working well on slopes. With a 38 HP water cooled Lombardini diesel engine, low center of gravity and working widths from 40" to 52", this tractor can handle many of your toughest jobs in tight spaces with ease.



NEW

BASE 20

The Base 20 is the most compact tractor of the Goldoni Articulated Tractor Series. With a width of just 32", this tractor will go where no others will. A 21 HP air cooled Lombardini diesel engine, 6 forward speeds and narrow profile make this the perfect tractor for mowing, tilling and cultivating in tight plantings.



*Goldoni conventional tractors
are available by special order.*



Premium Walk Behind 2-Wheel Tractors

NEW

JOKER 12S

The Joker 12S uses a cast gearbox and Honda 9 HP recoil start engine for durability and long service life. With 4 forward gears and reversible handles, the Joker can utilize other front mount attachments, but comes standard with their 27" adjustable tiller.



NEW

TWIST 6

The Goldoni Twist 6 has a Honda 5.5 HP recoil start engine, 22" tiller box and 4 forward speeds to give big performance in a small package.





Technology as a passion.

The Ultimate Trail and Farm Machine

The Goldoni Transcar is a powerful, versatile and compact off road workhorse. With articulated steering and a 3500 lb. load capacity, the Transcar will make small work of your biggest jobs. From trails to construction sites to horse farms, the Goldoni Transcar does it all.

Transcar W33SN "Syncro"

- Engine: Lombardini 2-cylinder diesel LDW1503 475kw, 33 HP, water cooled
- Transmission: Manual shift, synchronized with 8 speeds forward and 4 reverse
- Hydraulic service brake, double circuit acting on all four wheels
- Mechanical parking brake, acting on the rear wheels
- Power steering - articulated
- Rear standard 540 PTO
- ROPS approved rollover protection with seat belt
- Trilateral hydraulic dumping through a 4 stage sliding cylinder
- Tires: 10.0/75 x 15.3 ag tires, turf tires optional
- Body: 89"L x 59"W x 14"H

Transcar W40SN "Syncro"

Our #1 Seller!

- Lombardini LDW 1603 three cylinder diesel engine, 36.2 HP, water cooled
- Tires: 10.0/75 x 15.3 ag tires, also available with turf tires
- 16 speed synchronized transmission, 8 forward and 8 reverse with reverser
- 4 WD with rear wheel mechanical disengagement
- Differential lock—both axles—hydraulically operated
- Hydraulic brakes, double circuit, acting on all four wheels
- Hydrostatic steering—articulated
- Rear PTO—standard at 540 rpm, clockwise rotation
- Trilateral hydraulic dumping through a 5 stage sliding cylinder
- ROPS approved rollover protection with seat belt
- Body: 94"L x 59"W x 16"H



RENTAL AVAILABLE



3-Way Dump: Right, Left and Back



Other models available by special order



TrakMats™



**NO RUTS
NO DAMAGED LAWNS OR GROUNDS
NO WEATHER DELAYS
NO MORE DAMAGED PLYWOOD
3 Year Warranty!**

TrakMats is a 1/2" thick polyethylene mat made from 100% recycled material used to support heavy equipment on grounds or turf. Polyethylene is very flexible and will hold up to 60,000 pounds. **No more ruts, damaged lawn or weather delays!**

The mats are UV protected and not affected by hot or cold. The light colored mats stay cool and are manufactured in convenient sizes to fit the job. We recommend the width of the mat should be at least 1/3 wider than the widest tire on the vehicle. That gives the driver a mat size they can stay on so the load can be distributed to the ground. Hand cutouts are provided to assist lifting the mat.

TrakMats will not absorb water, will not dry rot and are not affected by oil, gas, or other chemicals. No more heavy, wet, rotten, broken, slippery plywood! Guaranteed against cracking and breaking for 3 years from date of purchase. To clean, simply wash with water.



**RENTAL
AVAILABLE**

**STRONG
FLEXIBLE
EASY-TO-USE**



**YOU NEED A MAT SYSTEM TOUGH
ENOUGH TO DO THE JOB ...**

LIGHT:
TRA TM2248 - 22 1/2" x 4' x 1/2" • 19 lbs.
TRA TM2272 - 22 1/4" x 6' x 1/2" • 29 lbs.
TRA TM2296 - 22 1/4" x 8' x 1/2" • 39 lbs.
TRA TM3696 - 36" x 8' x 1/2" • 64 lbs.
TRA TM4496 - 44 1/2" x 8' x 1/2" • 78 lbs.



**BLACK (for use in mud conditions or where
damage to lawns is not a concern):**
TRA TM2248B - 22 1/2" x 4' x 1/2" • 19 lbs.
TRA TM2272B - 22 1/4" x 6' x 1/2" • 29 lbs.
TRA TM2296B - 22 1/4" x 8' x 1/2" • 39 lbs.
TRA TM3696B - 36" x 8' x 1/2" • 64 lbs.
TRA TM4496B - 44 1/2" x 8' x 1/2" • 78 lbs.

Use with all kinds
of vehicles
(no steel tracks)



**3-YEAR
WARRANTY**



W.W. Manufacturing Company, Inc.

TRACKING WAGONS (TRAILERS)

Standard sizes available: 4'x8' (WWM 87), 5'x8' (WWM 90), 4'x10' (WWM 88), 5'x10' (WWM 91), 5'x12' (WWM 92) and 6'x12' (WWM 93). Other sizes special order. Freight only.



- Drawbar with Clevis hitch (folds for storage)
- Expanded metal deck
- Front axle parking brake applied when drawbar is raised/stored
- Heavy steel construction with angle iron
- Rear hitch for next wagon drawbar
- Both axles steer
- High speed wheels, bearings, hubs and axle pivot points.

To order: Call for quotation.
Options include multiple decks.

GO FOR CART

Large H.D. deck 27"x60", deck cover expanded metal, deck height 20", two swivel pneumatic wheels front, 2-16" fixed pneumatic wheels rear. Carrying capacity 600 lbs.
WWM 78



Tree/Ball Carts

Heavy duty welded steel tube standard with wide floatation tires, two sizes 24" and 36" ball size. Truck freight only.

24" ball 25" frame width, 29" overall 1" axle, 16x6.5x8 tires, 1000# cap.

WWM 224F

36" ball 30" frame width, 38" overall, 1" axle, 16x6.5x8 tires, 1000# cap.

WWM 230F



SERVICE CARTS (WAGONS)

Heavy duty carts for garden centers or nurseries. 600 lb. capacity. Pneumatic tires, expanded metal deck, 4" high railing. Two sizes.

WWM 81 - 28"x48" deck
WWM 82 - 24"x36" deck



BAR B7-BW

BAR B3-4C

Pack-It Tree/Goods Carrier

BAR B3-4C - 68" x 68", 2-4 person carrier • 6.25 lbs.

BAR B7-BW - 49", 2 person carrier • 2.8 lbs.





Model RI
A tough versatile landscape
rake for Category 1 or 2
tractors, 35 HP and up

**Quick Hitch
Compatible!**



NEW

Max. Raking Width	6' - 10'
HP Rating	35 HP and up
Hitch	Cat. 1 or Cat. 2 3 pt. or quick
Caster Wheels	Optional, Pneumatic (6")
Cutting Edge	Optional, Replaceable Cutting Edge
End Boots	Optional
Scarifier	Optional, 10 heat treated, reversible, alloy steel points, 72" wide



Model FM
Put a front mount rake
in place of your snowplow!



NEW

MODEL	007518	007528	007538	007548	007568
Fits Hitch (Snowplow)	Fisher	Western	Diamond	Meyers	Boss
Max. Raking Width w/extension down: 11'					
Max. Raking Width w/extension up: 90"					
Caster Wheels	Standard, 13/6.50 x 6 Pneumatic tires with high speed bearings				




BUSH HOG®

Call for information on all these Bush Hog items



2103



2101



2102

2100 Series Post Hole Diggers

Three models available.
Cat 1 or 2 mounting, 48"
digging depth, 6"-24"
augers.



MBX Series Box Rakes

60" - 96" widths



35 Series Blade

Available in 4, 5, 6 and
7 foot operating widths.



LLR & MLR Series Rear Rakes

Light and medium Duty

60" - 90" widths. For tractors up to 50 HP.



70 Series Blade

Available in 6, 7,
and 8 foot
operating widths.

BUSH HOG
Front end loaders.
Available in
factory colors



BUSH HOG
Backhoes are
available in
tractor factory
colors



Worksaver™

Clear more brush!

Worksaver Grapples designed for tractors
that are equipped with a front loader.
2 sizes available.

Maschio Rotary Tillers

The Maschio Rotary Tillers have provided a strong reliable tool for over 40 years to the agricultural market. Available in a wide variety of sizes. Contact us for details.

Other models available to 10' widths



NEW

W Series

41"-52" width

Single speed, chain drive, adjustable offset mast



NEW

H Series

65"-81" width

Single speed, chain drive, fixed mast



NEW

U Series

63"-93" width

4 speed, gear drive, fixed mast



REARS PAK Fork

The "All-Around-Farm-Tool"

- Constructed from 2"x4" rectangular tubing
- 3 pt. hitch Cat. 1
- Transport fork
- Hooks up FAST
- 26" wide
- 44" load length
- Weight: 98 lbs.- truck freight
- 1000 lb. capacity

**BEST
SELLER!**



Use it to haul pallets of fencing, fence posts, hay and feed. Transport tote boxes of fruit and vegetables. Move irrigation pumps and small buildings. The list goes on and on ... that's why it's called the "All-Around-Farm-Tool"!

REA PAKFORK



- Expand machine usage
- No hardware or chains needed
- Adjustable tine spacing
- Attaches in seconds
- 7 sizes
- 2,500-22,000 lb. capacity


CTI produces forks which adapt to the loader bucket of a farm tractor, backhoe or industrial loader eliminating the need for a separate forklift. These forks are solid steel attached by welding brackets to the bucket top lip. A

connecting bar holds the tines and when the bucket is rolled back, the forks are attached. The tines adjust, no hardware or chains are necessary - and they attach in seconds! Call for more information. See price list for models.



REARS PAK-STAK

Hydraulic fork lift attachment. Available in 3 pt. hitch or subframe mount. 84" - 94" lift height. Fixed or hydraulic tilt. **REA PAK-STAK**

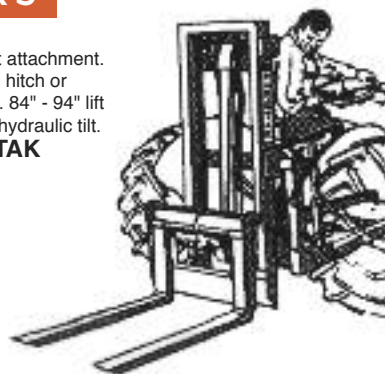

Clamp-On Bucket Forks -

Models BF-1000, BF-2000, BF-3000, BF-4000, and BF-6000



Available in 5 models from 1,000 to 6,000 lb. capacity. Mounts in seconds without tools, equipped with handles for easy mounting, adjustable handles and safety rated at twice the capacity.



TT4800 and TT4900 Universal Lifts

- Designed for easy on-off
- Convenient operation to any Cat. 1 or 2 three-point hitch tractor
- Top link adjustable 22"- 28"

3-point TRANS-PORTER

Cat. 1, 3 pt. hitch. Low cost carrying device designed to lift bulk bins, feed, baled hay - almost anything including other implements.



- Lifting height - up to 16"
- 46" solid steel forks
- Tilts 10° at maximum lift height

EDW TP6412 - 1500 lb. capacity

For more models and detailed information please contact us.



SPIN GROOMER

Conditions and levels arena surfaces. Spins as you pull it. Levels at the edges. 4 sizes: 5-8 foot diameters. Adjustable with just one moving part. Bolt on hardened tines.



With attachable rake



BLIZZARD

Agricultural Snowblowers

NEW

48"-94" width, for 15-75 HP tractors. Manual or hydraulic rotation.

**Contact us
for details
and options**





ACCURATE AND PRECISE

EUROPEAN MANUFACTURED VICON SPREADERS

Super Flow spreaders from Vicon fulfill all requirements for a long service life. The glass fiber reinforced polyester hopper and stainless steel meter disc is unaffected by aggressive types of fertilizer. The spreading unit and frame use the unique Duracoat Powder painting system for exceptional corrosion resistance. The bearings of the spreading unit have easily accessible grease fittings for maximum ease of maintenance.



The spreader is shipped with one standard broadcast spout. Many spout options are available for banding and narrow spread patterns. Call for options like covers, agitators, and hydraulic controls.

Specifications								
Model	203	303	403	503	604	754	804	954
Hopper lbs.	400	600	950	1200	1400	1650	1900	2100
Cu. Ft.	5.9	8.9	14.1	17.6	21.2	26.5	28.2	33.5
B.U.	4.7	7.1	11.2	14.0	16.9	21.2	22.5	26.8
Filling Height	30"	36"	35"	40"	38"	38"	42"	42"
Spreading Width	3'-4.6"	3'-6.6"	3'-6.6"	3'-6.6"	3'-6.6"	3'-6.6"	3'-6.6"	3'-6.6"
Machine lbs.	163	176	267	278	320	335	344	351

Vicon Máquinas Agrícolas Ltda.

Manufactured in South America. Heavy fiberglass hopper with (non-adjustable pendulum), spreads up to 39' wide.

Optional spouts available.

It is important to know that this is **NOT** the same spreader as the European Vicon Spreader. Options and parts are different.

The Economical Option



Models and capacities. Shipped with standard spout.

Model Number	Capacity	Weight Empty	Width X Height
VMA PS 303	660 lbs.	187 lbs.	3.4' x 3'
VMA PS 403S	880 lbs.	240 lbs.	4.7' x 3.2'
VMA PS 503S	1,100 lbs.	253 lbs.	4.7' x 3.6'



3 PT. AND PULL SPREADERS

NEW sitrex SPREADERS

2 Pull Models available



FSP 100



FSP 150

Spreaders for green areas and garden use. The FSP series spreaders are designed to be used on small tractors, utility vehicles and ATV's without PTO shaft. These spreaders can be used for spreading fertilizers, sand or salt depending on the needs of the user.

Model	Hopper cap.	Max. load cap.	Width of spread pattern	Overall height	Hopper width
SIT FSP-100	26.5 gallons	264 lbs.	2.2-6.5 yards	40"	32"
SIT FSP-150	38 gallons	352 lbs.	2.2-6.5 yards	42"	36"



Crop Care™ Row Mulchers

By



Unsurpassed Mulching Versatility

The Crop Care™ Row Mulcher by Lanco lets you apply mulch in a wide range of applications. You can apply a pattern that is up to 48" wide and 1/2" deep, or 12" wide and 8" or more deep, depending on material conditions and travel speeds.



Model LS-1450

- 5.4 yards, heaped - 6000 lb. cap.
- 30 HP tractor required
- 96" Hopper length
- 36" Hopper width
- Fully adjustable tilting conveyor
- Dual directional delivery system
- Mulch from both sides
- Body: 12 gauge galvanized steel

Standard features:

- 2-way conveyor
- PTO Hydraulic drive
- Fine chain
- Manual endgate

**RENTAL
AVAILABLE**



Cross beam supports. Poly lumber deck has a 10 year warranty. Allows almost any kind of material.



Tilt control dual directional belt

Other models and capacities available

NEW

5-in-1 SUPER SPREADER

Other options available

INTERCHANGEABLE SPREADER ATTACHMENTS

The Lanco 5-in-1 Super Spreader is a state of the art spreading machine for spreading many kinds of material. The 5-in-1 features interchangeable spreader attachments, 2.4 yd. (65 ft.) capacity, drive via tractor Hyd (requires 8 GPM), net weight 2,300 lbs., maximum payload 8,300 lbs., W 67" x H 70", Length 157", Apron Chain with 3-1/2" slat opening spacing, rack and pinion end gate, and agricultural rib tire (11L x 15, 8 ply)



LCO BT01	Beater Attachment - For straw manure
LCO BR01	Brush Attachment - For top dressing turf (sand or mulch)
LCO CC01	Cross Conveyor (L or R) Crescent Belt - For row mulching
LCO CC30	Cross Conveyor Dual (L & R) w/2 CC20 Deflector Kit - Used for row mulching (L and R at the time)
LCO DD01	Dual Disc Attachment - Used for fertilizers and compost